


spectratek™

InstaCure UVLED

HAND-HELD HIGH PERFORMANCE UVLED CURING LAMP

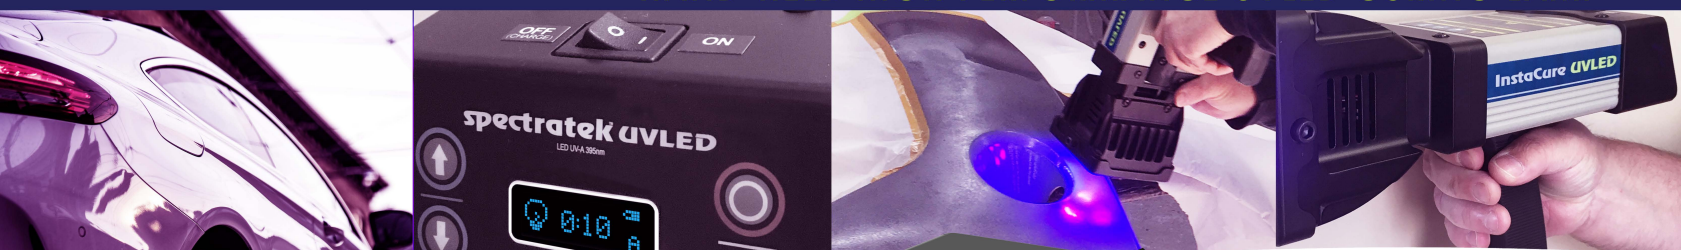

Reference: 28.SPTUVTEK500



An hand-held UVLED curing lamp usable on all current ultraviolet light curable fillers, base coats (primers), top coats, and clear coats.

Almost instant full cure with no heat.

spectratek InstaCure UVLED

Benefits & Advantages

Designed and built in Canada for worldwide use on all current ultraviolet light curable fillers, base coats (primers), top coats, and clear coatings.

Faster, safer, and efficient UV curing for automotive repair and industrial finishes.

The **SPECTRATEK InstaCure UVLED** curing lamp allows an easy and complete access to all parts and sections of the vehicle.

The UV LED units are glass protected. The glass can be easily removed for cleaning. No need to unscrew

- **Almost instant full cure with no heat.**
8-15 seconds at 50mm (2") from the curing surface.

- **Successfully tested on UV paint products by the major paint manufacturers** (Akzo Nobel, BASF, PPG, Axalta, etc.).
- **Only emits UV-A. No harmful UV-B & C.**
- **Efficient heat dissipation system assisted by fan.**
- **Safety handling without risk of burns.**
- **Uniform & constant irradiance managed by a state-of-the-art MCPCB.**
- **No need to remove the batteries during the recharging process. The battery charger can be connected directly on the lamp unit.**

General Specifications

Rechargeable battery type:	Li-ion 18.5 VOLT - 3,000mAh
Battery charge cycles life:	1,000 cycles
Battery autonomy:	2 hours
Battery charger:	110-240VAC, 50-60Hz, Short circuit/Overload protection
LED type:	High power LED
LED lamp wattage:	55 watts
Wavelength:	395nm (UV-A only)
Weight:	2 kg (4 lbs)
Lamp unit dimensions:	300mm (11-4/5") L x 110mm (4-1/2") W x 200mm (8") H


Technical Specifications

	@ 50mm (2") curing distance	@ 200mm (8") curing distance
Curing zone dimensions:	100mm x 100mm (4" x 4")	250mm x 250mm (10" x 10")
Emitting zone dimensions:	80mm x 80mm (3-1/5" x 3-1/5")	80mm x 80mm (3-1/5" x 3-1/5")
Curing time:	8 ~ 15 seconds	1 ~ 2 minutes
Average Irradiance:	112.8 mW/cm ²	21.7 mW/cm ²
Peak Irradiance:	200.0 mW/cm ²	40.0 mW/cm ²
Nbr. LED UV:	12	
Body lamp material:	Aluminium	
Cooling system:	Passive Thermal Management System enhanced with fan	
LED lifetime:	35,000 hours	
Storage temperature (°C):	-40°C ~ +80°C	

*The curing time may vary according to the paint product type, the curing process and/or other factors

Irradiance results:

The LED units are driven through a specially designed control system allowing a constant and uniform irradiance during the complete battery autonomy.

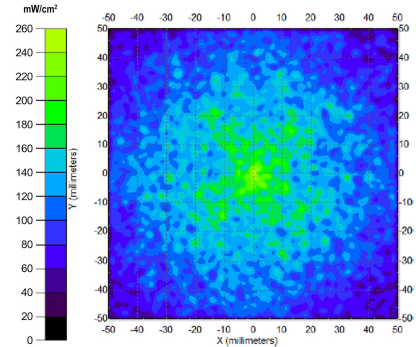

Control System:

Controlled through a membrane switch allowing 2 different control modes: **Automatic & Manual Mode.**



Digital counter, battery level symbol and control mode displayed on screen.

The **MANUAL MODE** allows the operator to simply press on the trigger to start a curing process.

Storage case:

The SPECTRATEK InstaCure UVLED is provided with a storage case made of durable material. Battery charger, AC cable and UV safety goggles also included.



AMH Canada Ltd, 391 rue Saint-Jean-Baptiste Est, Rimouski (Québec) Canada G5L 1Z2

CANADA and other countries Tel: (418) 724-4105 Fax: (418) 722-6108 EUROPE Tel: ++33 616 995 408

USA Tel: (910) 371-9313 Fax: (910) 371-9417 ASIA: +86 10 88 86 40 98

