


## Wiltec Paintstop Purple

The Paintstop Purple filter is a filter medium that consists of a high-quality glass fibre material. The Paintstop filter has a high efficiency, which is possible by the progressive construction whereby the dust particles are better retained in the filter. Due to the special structure, the filter medium has only a small increase in resistance despite heavy pollution. The filter has a skin layer for extra high efficiency.

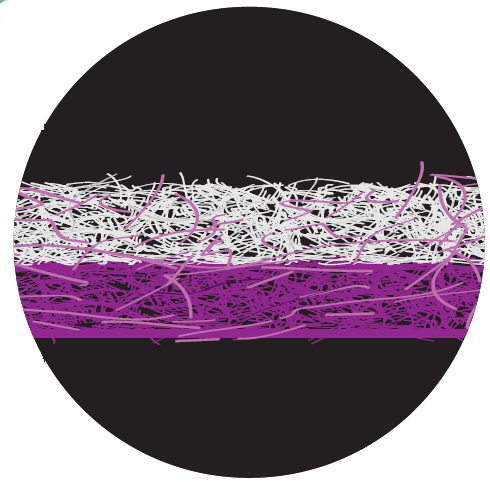

### Technical details

Medium thickness:	65-75 mm
Colour in/out:	White/Purple
Weight:	380 gr/m <sup>2</sup>
Efficiency:	99,59 %
Recommended airflow:	0,5 – 2,5 m/s
Initial pressure drop:	7,5 Pa
Final pressure drop:	142 Pa
Holding capacity:	Up to 3,8 Kg/m <sup>2</sup>
Max. operating temperature:	150 °C
Max. humidity:	100%
Fire resistance:	A2 - EN13501
Customs code:	70193100 - Mats of irregularly laminated glass fibres

### Dimensions

**Standard width Rolls:** 0,50 / 0,75 / 1,00 / 1,50 / 2,00 M\*

**Standard length Rolls:** 20 / 60 / 91 m \*

**Pads / Wireframe:** Every size \*

**Cassettes:** 497 x 497 x 45 mm / 597 x 597 x 45 mm \*

\* Other dimensions and types on request

### Application:

The Paintstop filter is specially designed for the overspray filtering in spray rooms and in spray booths. Suitable for both wall and floor extraction.