




3M Science.
Applied to Life.™

When impact resistance matters.

3M™ Impact Resistant Structural Adhesive

3M™ Impact Resistant Structural Adhesive

07333

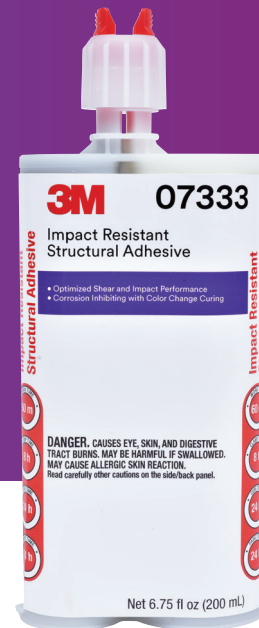

Designed specifically to meet OEM requirements where impact strength matters most.

3M™ Impact Resistant Structural Adhesive is designed to meet specific strength requirements for parts such as frame rails, strut towers, sills, pillars and other members where impact resistance is important. This type of adhesive possesses a much greater ability than traditional bonding adhesives to absorb and manage energy under a variety of forces, especially peel and cleavage stresses in extreme temperature conditions. Typically impact resistant structural adhesive is used in conjunction with rivets, spot welds or mechanical fasteners.

The above is a general description, repairers must always refer to individual automotive manufacturer procedures specific to model year for accurate information.



Curing process has begun, as indicated by silver to purple colour change (30 min. at 80°C)



- Higher impact strength versus traditional bonding adhesives
- Recommended by many OEMs
- Provides corrosion protection with lifetime warranty
- Room temperature curing (accelerated curing with heat)
- Can be weld bonded or rivet bonded within working time
- Adheres to a wide variety of properly prepared steel and aluminum substrates
- Dispenses silver, color changes to purple to indicate proper mixing and curing process has begun
- Glass bead technology protects against overclamping and maintains a minimum bond line thickness
- Has excellent shelf life opened or unopened, reducing unused product replacement costs

Optimized for Shear, Peel and Impact Performance

3M™ Impact Resistant Structural Adhesive is optimized to duplicate collision energy management pathways and energy absorption.



3M™ Impact Resistant Structural Adhesive

Part No.	Size	Colour	Chemistry	Work Time	Clamp/ Handling Time*	Cure Time
07333	200mL	Dispenses Silver, Cures Purple	Epoxy	60 min	8 hrs	24 hrs

*May be accelerated with heat.

Following OEM recommendations is very important for several reasons.

Help Ensure Safety: Meet the adhesive standards that have been set by the OEMs to manage crash energy and help protect occupants.

Use Trusted Products: Use products that have been rigorously tested to the OEM's performance requirements for strength and corrosion resistance.

Mitigate Risk: Help protect yourself and your business from potential liability — the vehicle was repaired as directed by the OEM.

Simplify Your Process: Eliminate confusion about which adhesive should be used and where. You're using the OEM recommended adhesive that is specifically called out for that procedure.


Get Reimbursed: OEM recommendations, which include 3M products, enable you to provide documentation to justify correct product usage and procedures needed for safe and responsible repairs.

OEM Recommendations

✔ 3M™ Panel Bonding Adhesive
 ✔ 3M™ Impact Resistant Structural Adhesive

Part No.	Fiat/ Chrysler	Ford	General Motors	Honda	Hyundai/ Kia	Jaguar/ Land Rover	Nissan	Tesla	Toyota	Volvo
08115		✔		✔	✔		✔		✔	✔
08116	✔		✔							✔
07333			✔	✔	✔	✔		✔		✔


Please reference OEM Repair Procedures: Collision repair shops should follow OEM recommendations. Always reference the OEM repair procedure to make sure the correct adhesive is being selected for that repair.

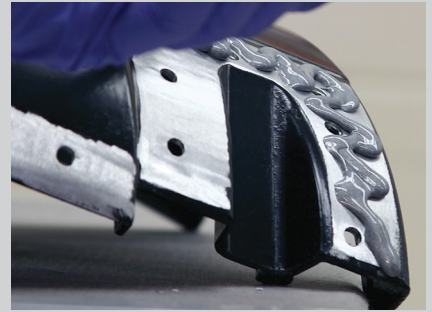


Applies easily to properly prepared substrates.




Can be weld bonded or rivet bonded within working time.

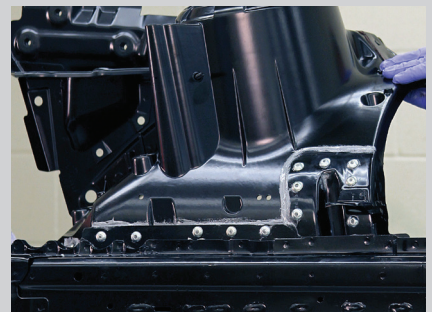

Adhesive bead dispenses silver.

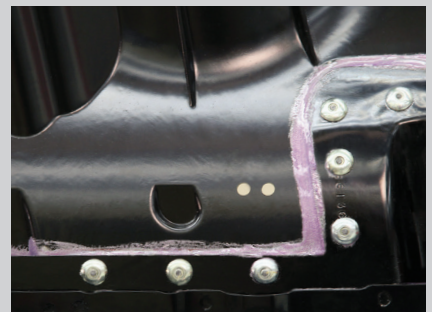

Colour changes to purple to indicate proper mixing and curing has begun.

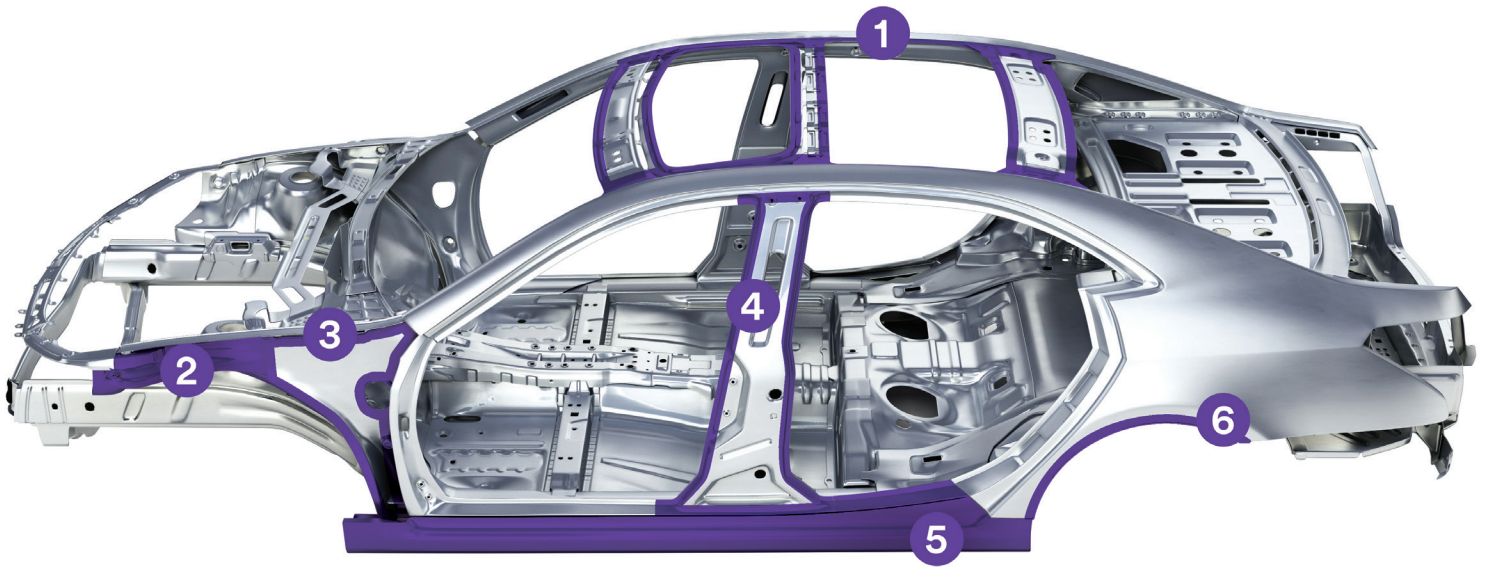

Quick Reference: Areas where 3M™ Impact Resistant Structural Adhesive may be used.

- | | | |
|---------------------------------|---------------------------|-------------------------------------|
| 1 Roof Skin | 3 Body Side | 5 Sill |
| 2 Front Upper/Lower Rail | 4 B Pillar/Uniside | 6 Rear Unibody/Wheel Opening |

Please reference OEM Repair Procedures.

Ordering Information

3M™ Impact Resistant Structural Adhesive			
Part No.	Size	Product	Case Qty.
07333	200ml	3M™ Impact Resistant Structural Adhesive	3/Case

Accessories		
Part No.	Size	Features/Applications
08193	400ml	3M™ Static Mixing Nozzle: 3/8 in. nozzle, pack (36)
08194	400ml	3M™ Static Mixing Nozzle: 3/8 in. nozzle, Bulk pack (50)
09930	200ml	3M™ Performance Pneumatic Applicator: Pneumatic — For 200mL product
08117	200ml	3M™ Performance Manual Applicator: Manual — For 200mL product

For more information, visit:



Automotive Aftermarket Division

3M United Kingdom PLC
Tel: 0845 603 9714
aadenquiries@mmm.com
www.3M.co.uk/bodyshop

3M Ireland
Tel: (00) 353 1216 0301
Fax: (00) 353 1280 3509

3M is a trademark of 3M Company.
© 3M 2019. All rights reserved.
60-4402-7864-0 Rev. 01/2019

Warranty and Limited Remedy: 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal or equitable theory asserted.

For health and safety information please refer to product labels and Safety Data Sheets.